


**36" DIAMETER MANHOLE  
AASHTO HS-20**

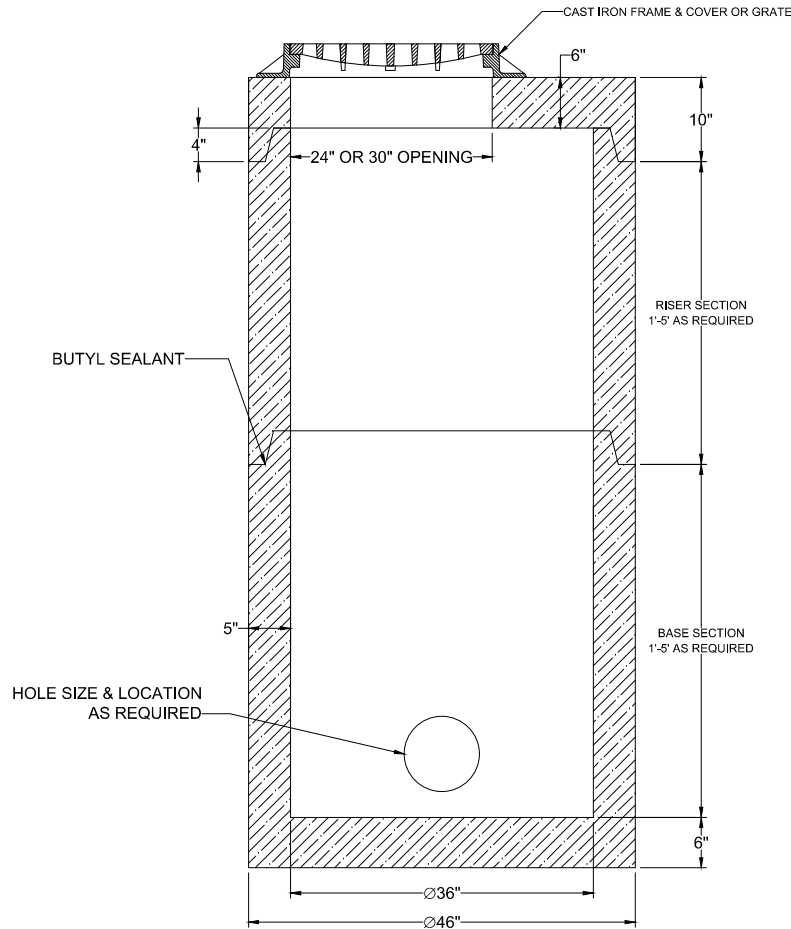

**Specifications :**

- Manhole Design Conforms to: "Precast Reinforced Concrete Manhole Sections ASTM C 478"
- Concrete Minimum Compressive Strength - 4,000 P.S.I at 28 days.
- Steel Reinforcement: ASTM A-185 Area 0.12 sq.in./vert.Ft. or Equal.
- Joint Sealant: Butyl Resin Sealant AASHTO M-198B, ASTM C-990-91, Federal Specification SS-S-210.
- Available w/Mortar Joint Knockouts ( storm ) , or Flexible Manhole to Pipe Connector ( sewer) ASTM C 923.
- Base Slab: Non-Extended, Monolithic Pour.
- Approximate Weight:

Base Slab: 800 LBS  
Risers: 675 LBS/VF  
Top Slab: 500 LBS

**NOTES :**


**MATERIAL :**

DOCUMENT APPROVED  
BY :                      DATE :

DWNG DATE : 08/06/2021

CHKD DATE :

TOLERANCE



**EASTERN PRECAST**  
COMPANY, INCORPORATED

2 COMMERCE DRIVE, BROOKFIELD, CT 06804  
PHONE : ( 203 ) 775 - 0230 FAX : ( 203 ) 740 - 2059  
WWW.EASTERNPRECAST.COM

**36" DIAMETER MANHOLE**

MODEL NO.	
LOAD RATING	
REVISION 1 - DATE	REV
REVISION 2 - DATE	