
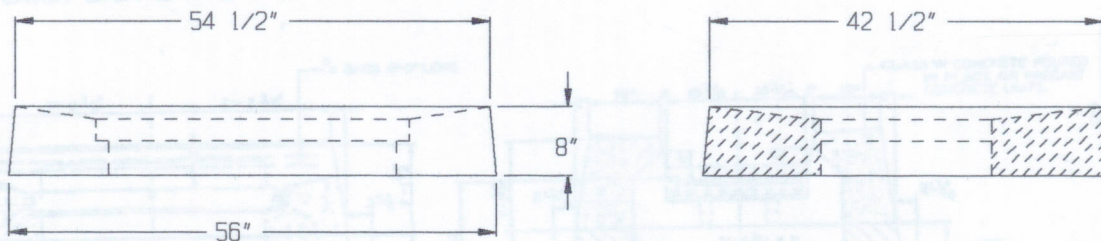


TYPE CL (CURBLESS) CATCH BASIN TOP


H-20

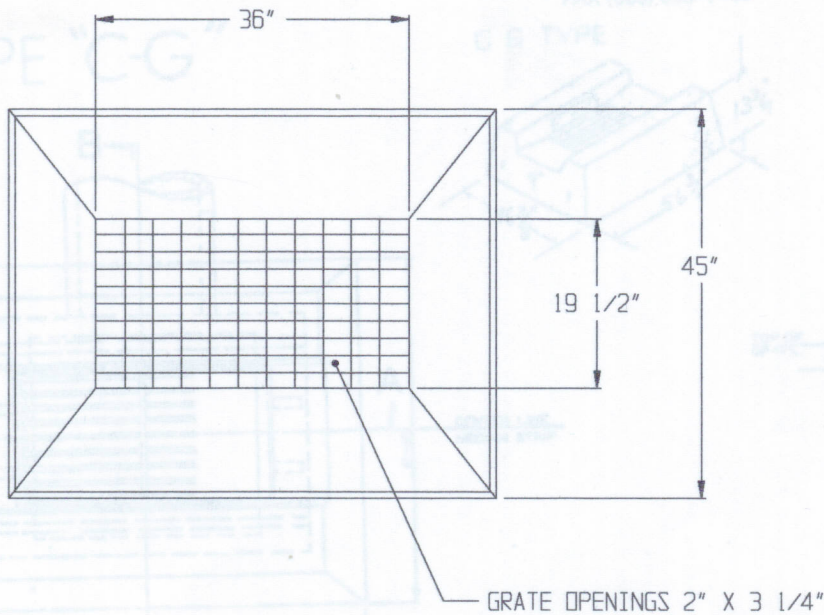

SPECIFICATIONS:

- * Concrete Minimum Strength-4,000 P.S.I at 28 days with Fibermesh.
- * Steel Reinforcement- #3 Rebar Grade 40.
- * Type A M507-K Steel Grate Meets H20 Wheel Load.
- * Steel Grate Is Bicycle Safe.

DWG # CL4556



EASTERN PRECAST CO. INC.

P.O. Box 5133 2 Commerce Dr., Brookfield, CT 06804
Phone (203) 775-0230 775-9380 Fax (203) 740-2059