


REGULAR DUTY 2 COMPARTMENT SEPTIC TANK

SPECIFICATIONS:

- * Concrete Minimum Strength-4,000 PSI at 28 Days w/ Fibernesh.
- * Steel Reinforcement-# 3 Rebar Grade 40.
- * Construction Joint (s) Sealed With Butyl Sealant.
- * Meets ASTM C1227.
- * Meets A-3 External Loading (300 PSF) Applied Uniformly Over Top, Bottom, And Walls. It Is The User's Responsibility To Install So That This Loading Criteria Is Not Comprised, Considering Soil Types, Ground Water Elevations, Backfill Requirements, and Applicable Live Loads.
- * Outlet Baffle Supplied With Gas Deflector Or Approved Filter. Installation By Others.

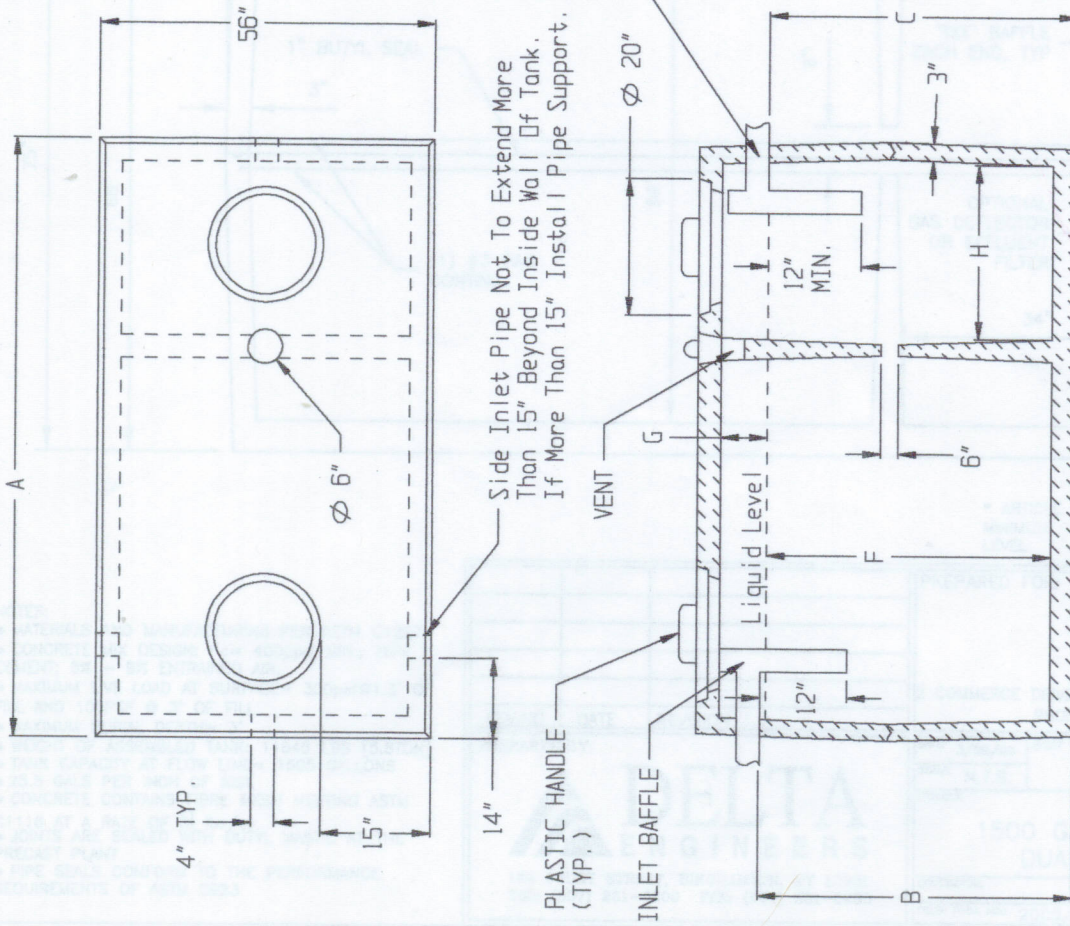

DWG # STREG-1

EASTERN PRECAST CO. INC.
 P.O. Box 5133 2 Commerce Dr., Brookfield, CT 06804
 Phone (203) 775-0230 775-9380 Fax (203) 740-2059

	A	B	C	D	E	F	G	H
Tank Capacity	D.A. Length	Inlet Hgt	Outlet Hgt.	D.A. Height	D.A. Width	Liquid Level	Air Space	Max. Backfill Cover
1000 Gallon	102"	56"	53"	67"	58"	49"	10"	28" (Soil not to exceed 100 lbs/cu.ft.)
1000 Gallon L.B.	124"	47.5"	44.5"	57"	58"	40.5"	8"	34" (Soil not to exceed 100 lbs/cu.ft.)
1250 Gallon	124"	56"	53"	65"	58"	49"	8"	34" (Soil not to exceed 100 lbs/cu.ft.)
1500 N.Y. State	124"	66"	63"	75"	58"	59"	8"	34" (Soil not to exceed 100 lbs/cu.ft.)