
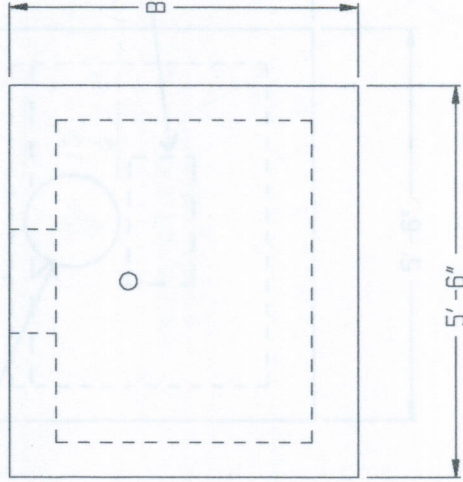
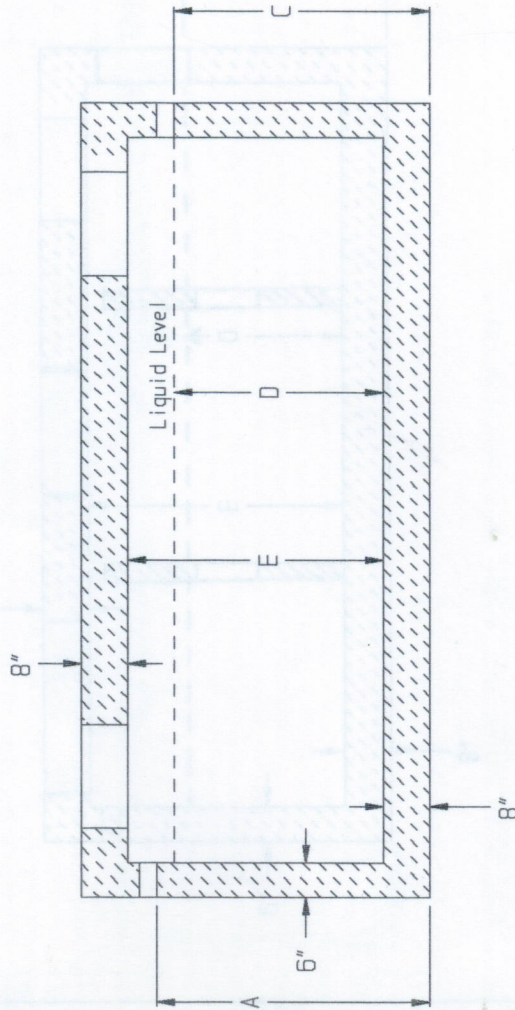


H-20 CUSTOM UTILITY VAULT

AVAILABLE WITH:


- * Custom Heights.
- * Optional Drop In Precast Concrete Baffles.
- * Various Diameter Pipe Knockouts.
- * Special Location Of Pipe Knockouts.
- * Construction Joint Sealed With Butyl Sealant.
- * Concrete Minimum Strength - 5000 PSI at 28 Days.
- * Steel Reinforcement - DB 4" x 4" Grade 60 Or Equal.

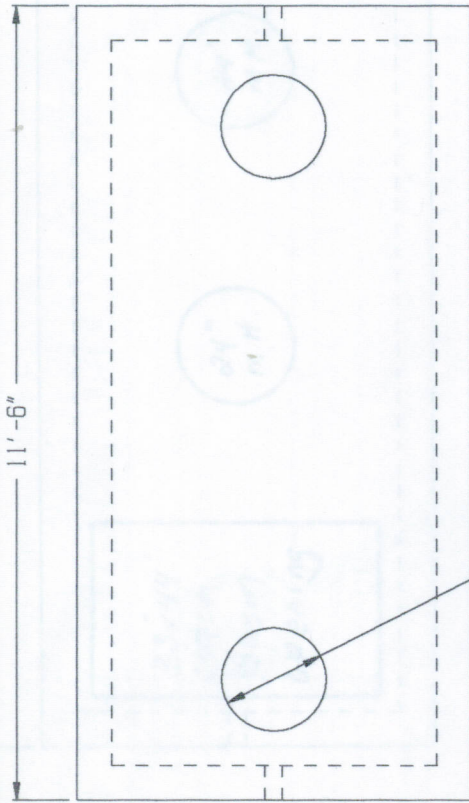

DWG # UVH20

EASTERN PRECAST CO., INC.

P.O. Box 5133 2 Commerce Dr., Brookfield, CT 06804
 Phone (203) 775-0230 775-9380 Fax (203) 740-2059



	A	B	C	D	E
Bank Capacity	Inlet Hgt.	D.A. Hgt.	Outlet Hgt.	Liquid Level	Inside Hgt.